48-Port Category 5e Patch Panel

PRODUCT SPECIFICATION

Package includes:

A. 48-Port CAT 5e Patch Panel, 1 pc
B. 6" Cable Tie, 10 pcs
C. #12-24 x 5/8" Pan Head, Pilot Point Machine Screw, 4 pcs
D. Installation Instructions, 1 sheet

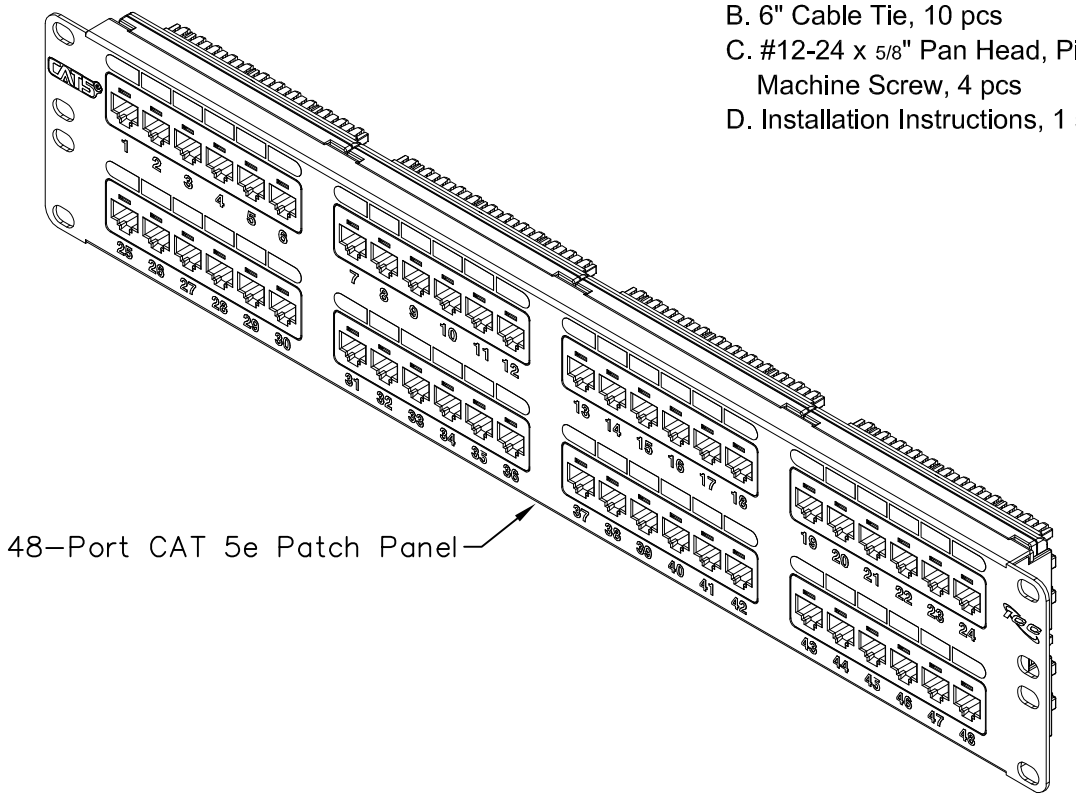

Features and Benefits:

- Rack mounted CAT 5e component rated patch panel provides excellent performance for data networks requiring maximum speed and bandwidth
- Enhanced crosstalk cancellation reduces return loss and improves performance by rejecting noise and unwanted signals
- Exceeds ANSI/TIA-568-C requirements for permanent, channel link and component performances
- Engineered to provide 110 IDC termination reducing installation time
- Includes both TIA-568A and TIA-568B color wiring diagrams
- Backwards compatible to all lower rated category components
- Designed to fit all standard 19" racks and cabinets
- 2 rack mount space (RMS)
- Used with ICPCSJ CAT 5e patch cords and ICACSPDT00 110 punch down tool
- Installation instructions
- UL 1863 compliant

PATCH PANEL, CAT 5E, 48-PORT, 2 RMS			
ITEM NO.	ICMPP0485E	REV. B	ICC Premium Products Proven Performance Competitive Prices
DWG NO.	PSMPP0485E	PAGE NO. 1	

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

© 2015 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.

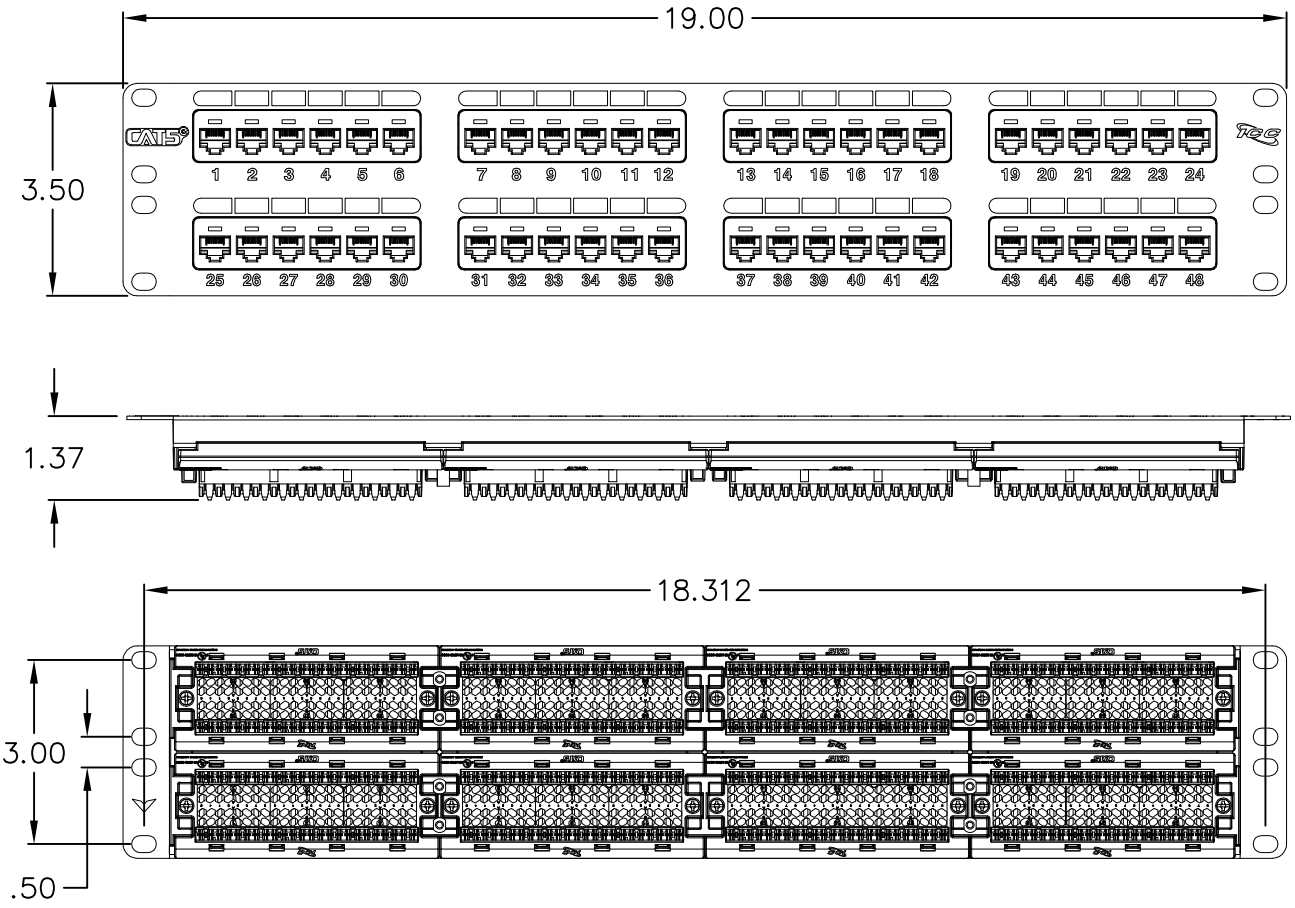

NOTE: UNLESS OTHERWISE SPECIFIED

1. 24-PORT CAT 5E PATCH PANEL:
   - A. MATERIAL:
     - -24-PORT PATCH PANEL: 16 GA CRS
     - -JACK HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
     - -SPRING WIRE: PHOSPHOR BRONZE
     - -110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH ALLOY
     - -GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL
   - B. SURFACE FINISH: BLACK POWDER COAT
   - C. MECHANICAL:
     - -MATING FORCE: 100 GRAMS MIN/CONTACT
     - TEMPERATURE RANGE: -40°~70°C
     - -PLUG RETENTION IN JACK: 50N (11 LBS SQ)
     - -IDC WIRE GAUGE: 22~24 AWG
   - D. ELECTRICAL:
     - -CURRENT RATING: 1.5 AMP DC
     - -CONTACT RESISTANCE: 2.5 MILOHMS MAX

RJ-45	110 CONNECTOR	UNIVERSAL WIRING	
		T568B	T568A
5 4	1 2	WHITE/BLUE BLUE	WHITE/BLUE BLUE
1 2	3 4	WHITE/ORANGE ORANGE	WHITE/GREEN GREEN
3 6	5 6	WHITE/GREEN GREEN	WHITE/ORANGE ORANGE
7 8	7 8	WHITE/BROWN BROWN	WHITE/BROWN BROWN

CAT 5e CONNECTING HARDWARE REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100
NEXT LOSS (db)	65.0	65.0	64.9	63.0	58.9	57.0	55.0	53.1	47.1	43.0
FEXT LOSS (db)	75.1	63.1	57.0	55.1	51.0	49.1	47.1	45.2	39.2	35.1
RETURN LOSS (db)	35.0	35.0	35.0	35.0	35.0	34.0	32.0	30.1	24.1	20.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.30	0.40

c UL us FILE NO. 125268

PATCH PANEL, CAT 5E, 48-PORT, 2 RMS			
ITEM NO.	ICMPP0485E	REV.	B
DWG NO.	PSMPP0485E	PAGE NO.	2

Premium**Products**
Proven**Performance**
Competitive**Prices**

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

© 2015 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.